




Main features

Power LED 3 W
Compact construction
Energy-saving — low level of heat development
Safe 12 V operation
Easy installation — ready for immediate use
Reverse polarity protected
Rotary pivoted joint for the continuous horizontal and vertical setting of the spotlight unit
5 years warranty
Upgradeable thanks to the module principle
Large range of accessories

Application

Under water up to a maximum of a depth of immersion of 4 m
Afloat
Punctual lighting of objects, trees and bushes
Lighting of water features
Fountain lighting
Wayside spotlight

Technical Data	CE RoHS, GS (Netzgerät)
Material	Stainless steel 1.4301
Angle of radiation	22°
Lamp	3 W Cree Power LED, warm white, 3000K — 3250K, 90 — 100 lm
Protection class spotlight unit	IP 68
Protection class transformer	IP 44
Working temperature	0° C to +40° C
Durability of the lamp	> 30.000 h
Voltage	12 V/AC
Power consumption	5 W
Supply line	H05RN-F, 2 x 0.75 mm ²
Operating temperature (above water level)	60° C

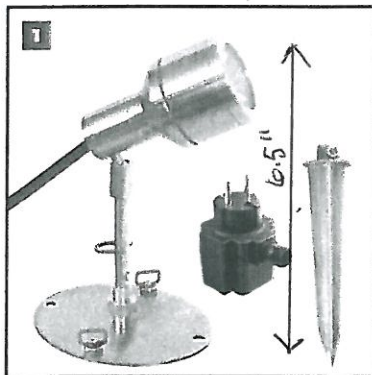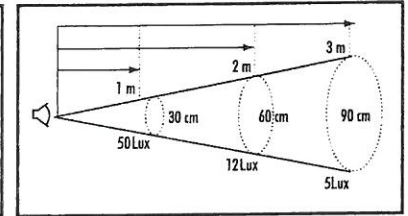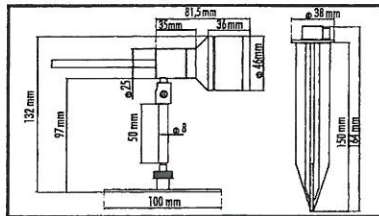

Content

- Light unit
- Lamp 3 W Power LED
- Supply line 5 m
- Rotary pivoted joint
- Width adjuster 5 cm
- Cable clip
- Floor fitting
- Ground spike
- Transformer 10 W
- Special key

Art. no. 44120
Skylight SPOT POWER LED SET

HEIGHT