


Supreme®

PONDMASTER® 2000

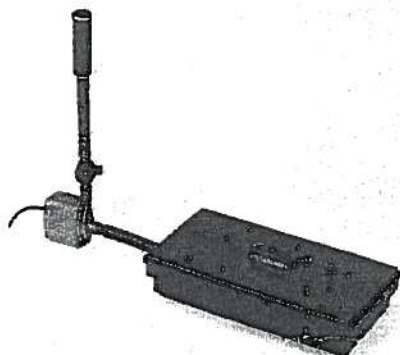

CARE AND INSTRUCTIONS:

THE POND FILTER RESTS ON THE BOTTOM AND IS DESIGNED TO CONNECT TO THE INTAKE OF A SUBMERGED PUMP BY THE 1" ID TUBING INCLUDED. IN LARGER PONDS, A LONGER PIECE OF TUBING CAN BE USED SO THAT THE FILTER CAN BE MOVED AS NEEDED TO COLLECT DEBRIS WHILE THE PUMP REMAINS STATIONARY. TWO OR MORE POND FILTERS MAY BE "TEED" TOGETHER FOR LARGER PONDS AND PUMPS.

THE POND FILTER HAS TWO LAYERS OF FILTERING MEDIA THAT COMBINE TO FILTER THE POND WATER. KEEP IN MIND THAT PHOSPHATES WHICH ARE PRESENT IN MANY WATER SUPPLIES, JOIN WITH THE INCREASED BIOLOGICAL LOAD PRESENT IN MOST MAN MADE PONDS TO MAKE A PERFECT BREEDING GROUND FOR ALGAE. DECREASING THE AMOUNT OF SUNLIGHT THAT YOUR POND IS EXPOSED TO AND ELIMINATING OVERFEEDING OF POND FISH ARE WAYS TO HELP REGULATE ALGAE GROWTH. NO MECHANICAL FILTERING SYSTEM ALONE WILL ELIMINATE ALGAE.

THE STURDY HANDLE MAKES IT EASY TO LIFT THE FILTER FROM THE POND WHEN ITS TIME TO CLEAN THE FILTER. AS THE FILTER IS LIFTED FROM THE POND, LEAVE THE PUMP RUNNING SO THAT AS MUCH WATER AS POSSIBLE IS TAKEN OUT OF THE FILTER. TURN THE PUMP OFF FOR CLEANING. WITH THE FILTER ON A FLAT SURFACE, UNSNAP THE COVER FROM THE BOTTOM ALONG ONE EDGE. THE COVER CAN NOW BE REMOVED AND THE FILTER MEDIA CAN BE TAKEN OUT FOR CLEANING. BOTH PADS CAN BE QUICKLY RINSED AND REINSTALLED IN THE FILTER.

IN SOME PONDS, AS THE WATER IS FILTERED, DISSOLVED GASES WILL SEPARATE AND THE FILTER MAY FLOAT. WE RECOMMEND THAT A PATIO BLOCK, A FEW PIECES OF SLATE OR A FEW LARGE FLAT STONES BE PLACED ON THE FILTER. AS AN ALTERNATE LAVA ROCK CAN BE PLACED IN THE BOTTOM OF THE FILTER AS SHOWN IN THE ILLUSTRATION. LAVA ROCK IS AN EXCELLENT BIOLOGICAL FILTER MEDIA.

WARNING: ELECTRICAL PRECAUTION; TO REDUCE THE RISK OF ELECTRICAL SHOCK, CONNECT ONLY TO A PROPERLY GROUNDED, GROUNDING TYPE RECEPTACLE. THE NATIONAL ELECTRICAL CODE, ARTICLE 680-41 (A) REQUIRES GROUND FAULT CIRCUIT INTERRUPTER (GFCI) BE INSTALLED IN THE BRANCH CIRCUIT SUPPLYING FOUNTAIN EQUIPMENT. ONLY A 3 WIRE GROUNDING EXTENSION CORD AND GROUNDED OUTLETS SHOULD BE USED. IF THE EXTENSION CORD PLUG CAN REACH THE WATER AND BE ACCIDENTALLY SUBMERGED IT SHOULD BE SECURED TO PREVENT SUBMERSION. DO NOT SEVERELY BEND THE ELECTRIC CORD NEAR THE PUMP CASE. THIS CAN CRACK THE INSULATION AND CREATE A SHORT.

LIMITED WARRANTY: E. G. DANNER MFG., INC. WILL REPAIR OR REPLACE ANY PUMP FOUND TO BE DEFECTIVE WITHIN ONE YEAR OF ORIGINAL PURCHASE. THIS WARRANTY DOES NOT COVER THE REPLACEABLE FILTERING MATERIAL SUPPLIED WITH THE PUMP AS IT IS CONSIDERED EXPENDABLE. CUTTING OR ALTERING CORD VOIDS ANY WARRANTY CONSIDERATION. FOR WARRANTY REPAIR RETURN ONLY THE PART THAT IS DEFECTIVE TO OUR FACTORY. PLEASE INCLUDE A DATED PROOF OF PURCHASE AND \$3.00 FOR POSTAGE AND HANDLING. DAMAGES OR INJURIES RESULTING FROM NEGLIGENCE OR MISUSE OF THE PRODUCT ARE NOT COVERED BY WARRANTY. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

CAUTION: PONDS CAN BE DANGEROUS TO SMALL CHILDREN. NEVER LEAVE CHILDREN UNSUPERVISED NEAR A POND.

E. G. DANNER MFG. INC. * 160 OVAL DRIVE * ISLANDIA, NY 11749

HAMP2000\INSRT\PUB