

WATER PUMPS

DIRECT DRIVE PUMPS - PE-SERIES

Designed to operate continuously, direct drive pumps produce greater starting torque and more pressure than comparable magnetic drive pumps. Direct drive pumps are ideal for statuary fountains. Pre-filter is included to protect the pump.



FEATURES

- Hooded volute option for lower intake (fountain)
- Hooded volute indicated by "H"
- Compact design
- Rated for continuous duty




ORDERING INFORMATION

| PE-Series | Item No. | Amps | Watts | Cord (ft) | Submerged Use | Discharge MNPT | Gallons Per Hour (GPH) @ Height | | | | Shut-off (ft) |
|------------|----------|------|-------|-----------|---------------|----------------|---------------------------------|-----|-----|-----|---------------|
| | | | | | | | 1' | 3' | 5' | 10' | |
| PE-1H-PW | 566604 | 0.6 | 36 | 6' | ✓ | 1/4" | 170 | 140 | 100 | - | 7 |
| PE-1F-PW | 566608 | 0.6 | 36 | 15' | ✓ | 1/4" | 170 | 140 | 90 | - | 7 |
| PE-2H-PW | 566609 | 0.8 | 47 | 6' | ✓ | 1/4" | 300 | 255 | 205 | 70 | 12.2 |
| PE-2F-PW | 566611 | 0.8 | 47 | 15' | ✓ | 1/4" | 300 | 270 | 240 | 130 | 12.2 |
| PE-2.5F-PW | 566612 | 1.4 | 80 | 15' | ✓ | 1/2" | 475 | 440 | 395 | 205 | 13.4 |



DIMENSIONS

| Dimensions (in) | A | B | C | D | E |
|-----------------|------|------|------|------|------|
| PE-1H-PW | 3.48 | 3.58 | 2.75 | - | - |
| PE-1F-PW | 4.9 | 3.6 | 2.8 | 0.9 | 1.89 |
| PE-2H-PW | 4.83 | 4.15 | 2.75 | - | - |
| PE-2F-PW | 5.6 | 4.2 | 2.8 | 0.9 | 2.38 |
| PE-2.5F-PW | 5.6 | 4.02 | 2.9 | 1.06 | 2.24 |

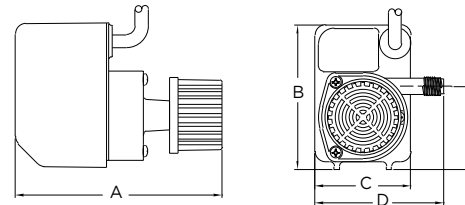

PE-2.5F-PW, PE-2F-PW, PE-1F-PW

PERFORMANCE

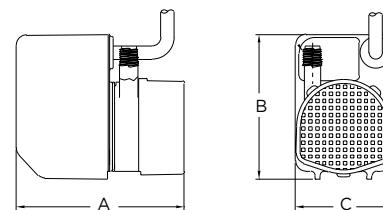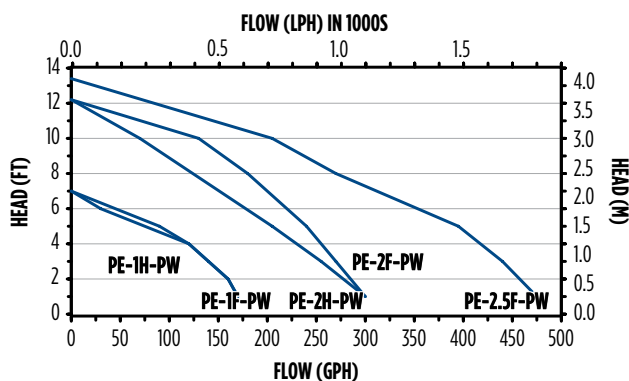

PE-2H-PW, PE-1H-PW

