


AquaBlox® Water Matrix®

Installation Instructions & Owner's Manual

- Step-by-step installation

Instructions for the following AquaBlox® Water Matrix® Applications:

- Pondless® Waterfalls
- RainXchange™ Rainwater Harvest System
- Constructed Wetland System
- Pump Wet Wells

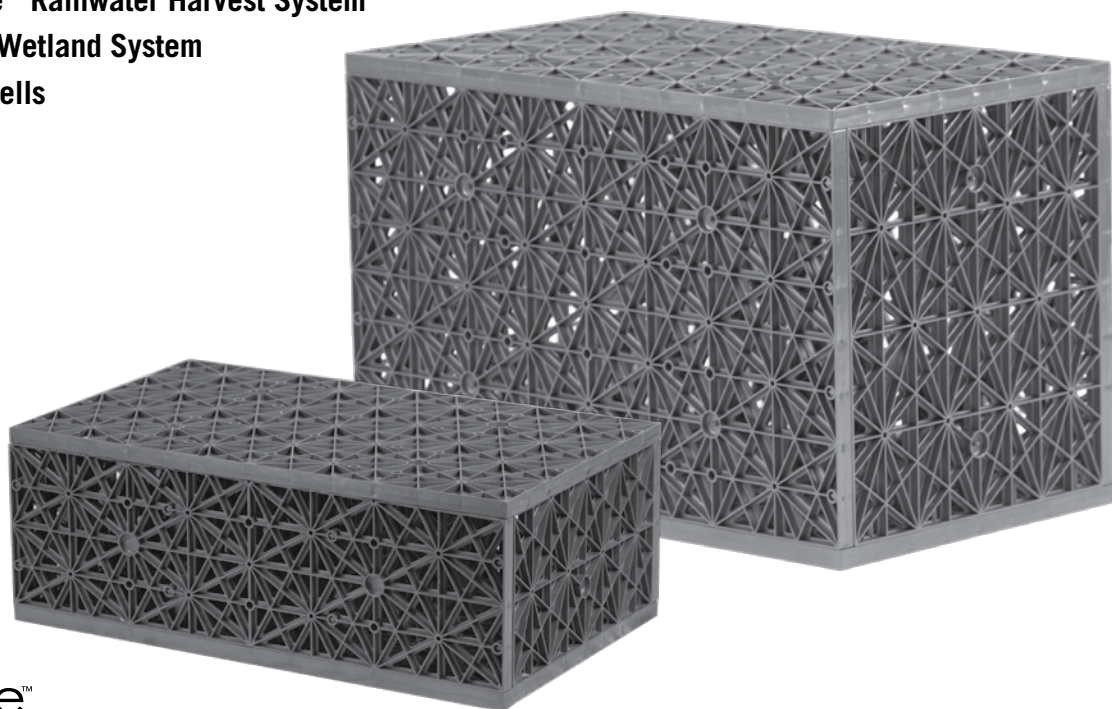

AquaBlox[®]

Water Matrix[®]

Table of Contents

1. Tank Assembly – Page 3
 - a. Single Module Assembly Diagram
 - b. Double Module Assembly Diagram
 - c. Triple Module Assembly Diagram
2. Water Storage Basin Excavation and Tank Installation – Page 4-7
3. Diagrams – Page 8-13
 - a. Pondless[®] Waterfall Diagrams – Page 8
 - Pondless[®] Waterfall Large
 - Pondless[®] Waterfall Micro
 - b. RainXchange[™] Diagrams – Page 9-12
 - RainXchange[™] Decorative Fountain
 - RainXchange[™] Pondless[®] Waterfalls
 - RainXchange[™] Permeable Paver
 - Water Storage Kits
 - 500 gallon
 - 1000 gallon
 - 1500 gallon
 - 2000 gallon
 - 2500 gallon
 - 3000 gallon
 - c. Constructed Wetland Diagram – Page 13
 - d. Wet Well Diagram – Page 13


AquaBlox® Water Matrix® Tank Assembly Instructions

- Step 1: Evenly distribute and connect the small panels to one large panel.
- Step 2: Next, working from one end to the other, attach a second large panel on the opposite side of the first.
- Step 3: Once the top and bottom large panels are attached, complete the sides of the tank module. This is a "single" AquaBlox® Water Matrix® tank.


To build a double unit (or larger), follow the directions above, connecting the small panels to large panel on the top of a built AquaBlox®. Proceed with the remaining panels to complete the stacked tank.

Completed AquaBlox® Water Matrix® modules should be staged as close to the installation area as possible.


Single Module Assembly

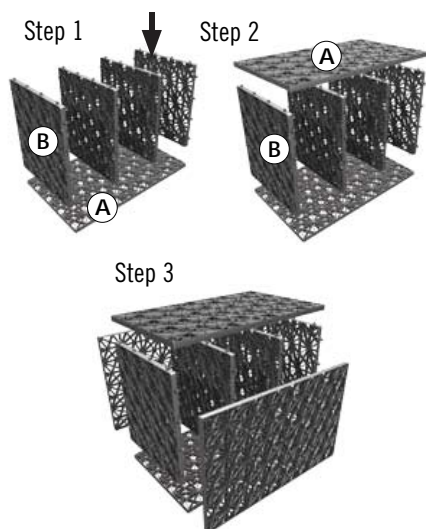


Triple Module Assembly

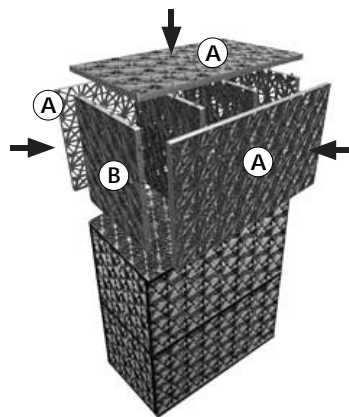

Double Module Assembly

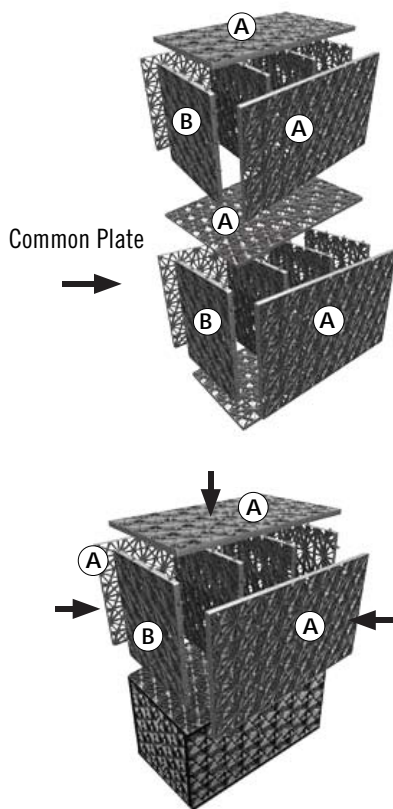

AquaBlox® Water Matrix® Components

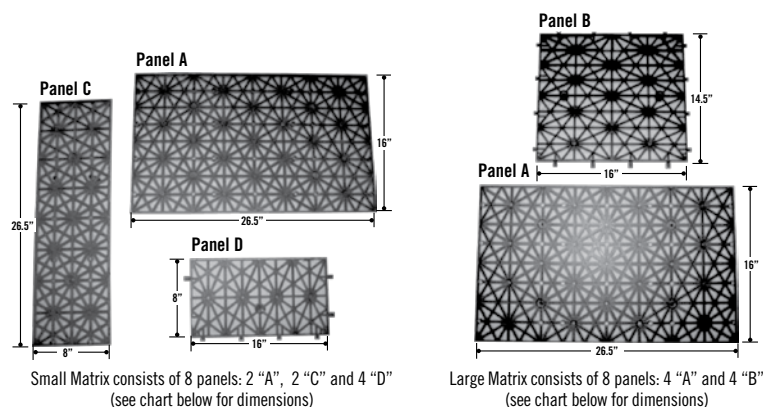


Be sure to check all pieces upon arrival for any damages that may have occurred during shipping

Small AquaBlox® Water Matrix®

The Small AquaBlox® Water Matrix® is recommended in use with Pondless® Waterfalls using the MicroSnorkel™ and MicroCentipede™ and also when constructing an upflow Wetland using the Large Snorkel™ and Centipede™.

Large AquaBlox® Water Matrix®

The Large AquaBlox® Water Matrix® is recommended in use with Pondless® Waterfalls and RainXchange™ System using the Large Snorkel™ and ½ or full Centipede™ as well as Wetland Filters using Large Snorkel™ and Centipede™.

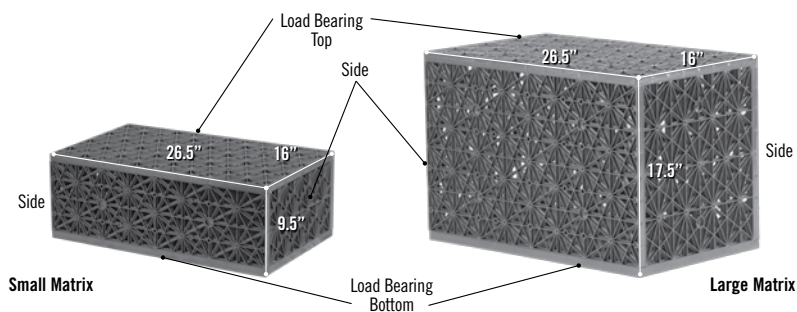

Tank Installation Instructions

Step 1: Excavate Basin

The excavation should allow for: AquaBlox® Water Matrix® tank dimensions, sufficient backfill material and compaction required during backfilling. An additional 6" per side is sufficient. For RainXchange™ Water Storage Kits please refer to diagram section for: basin dimensions, AquaBlox® Water Matrix® tank configurations and Snorkel™ and Centipede™ locations.



Note: Check for presence of high water table, which must be kept at levels a minimum of 3 feet below the bottom of the AquaBlox® Water Matrix® tank structure at all times.



Step 2: Excavate Location of Snorkel™ and Centipede™ Filters

Excavate recessed area for the Snorkel™ and Centipede™ filters. This positions the filters at the lowest point in the storage basin allowing maximum water availability for the pump system.

For RainXchange™ Water Storage Kits please refer to diagram section for Snorkel™ and Centipede™ locations.

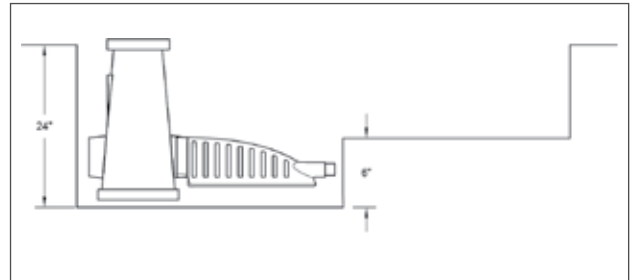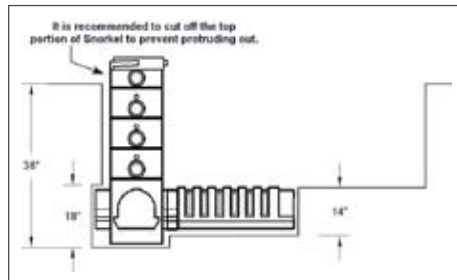

Step 3: Prepare Base

The base of the excavation should be smooth soil, flat and free of lumps and debris. Add compactable material such as sand, if existing soil conditions do not meet requirements listed above. The compactable material should be spread to a 4" minimum depth and compacted.



Step 4: Install Outer Geotextile

Lay the geotextile into the excavation covering the bottom and sides. Multiple sections of geotextile can be overlapped to accomplish complete coverage.



Step 5: Install Liner

Lay the liner into the excavation and position to cover entire storage basin. Do not trim the excess liner material until later in the project.



Step 6: Install Inner Geotextile

It is recommended using a second layer of geotextile within the lined storage basin to wrap around the bottom and sides of the AquaBlox® Water Matrix® tank. This is a precautionary step that helps protect the liner. Note: All RainXchange™ Water Storage Kits include enough geotextile for both the inner and outer geotextile installation. Lay the geotextile into the lined basin before installing the AquaBlox® Water Matrix® tanks. The geotextile does not need to be wrapped over the top of AquaBlox® Water Matrix® tank, just the bottom and sides.



Step 7: Install Snorkel™/Centipede™

Place the Snorkel™ and Centipede™ Modules into their proper location. Small cobbles will need to be backfilled around excess excavated perimeter of the Snorkel™/Centipede™ filter in order to provide a sufficient base for the AquaBlox® Water Matrix® tank to sit on.



Step 8: Install Tanks


Install AquaBlox® Water Matrix® tanks in the storage basin, butting them tightly against each other. After placement of the tanks, bring the inner geotextile (if using) up the sides of the tanks. For RainXchange™ Water Storage Kits please refer to RainXchange™ Water Storage Kits diagram that is being installed for the proper tank configuration.



Note: When stacking AquaBlox® Water Matrix® tanks only one panel “A” is required between the two joined AquaBlox®. See tank assembly instructions for more detail.

Tank Module Orientation: The AquaBlox® Water Matrix® tank must be installed with the correct orientation to ensure maximum load bearing capacity. See images below.

Proper Orientation

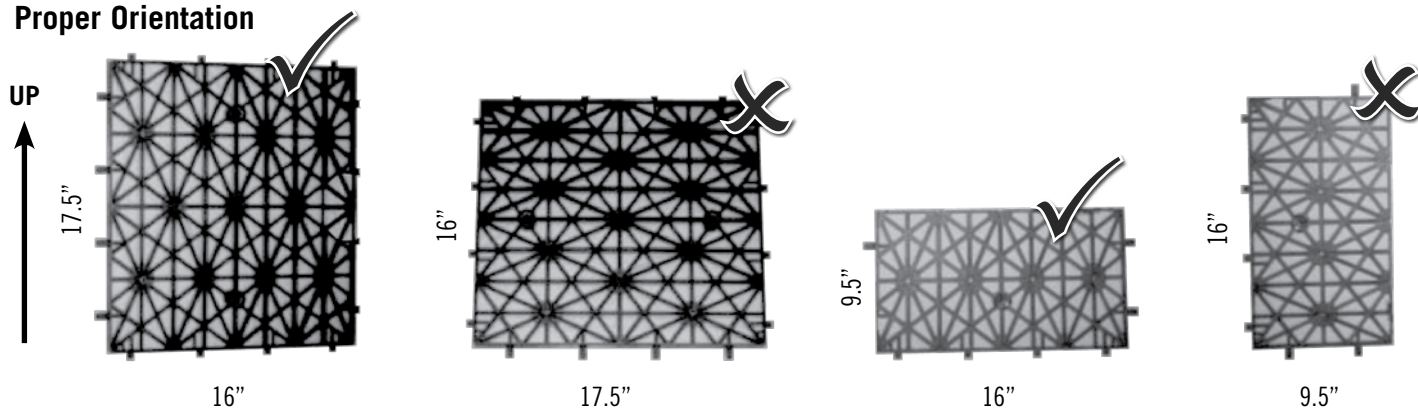

Step 9: Backfill Sides

The excess excavation along the outside perimeter of the storage basin can be backfilled once all of the AquaBlox® Water Matrix® tanks are installed. Use compactable material to backfill evenly on all sides to secure the AquaBlox® Water Matrix® tank into position. Backfill materials containing clay should not be used. Liner can be trimmed at least 3" above water level.



Step 10: Install Overflow (RainXchange™ Systems)

The RainXchange™ Water Storage system requires an overflow to be installed in order to manage any excess water entering the basin. The overflow should be located as high as possible in the storage basin in order to maximize the amount of water storage. The overflow is installed by trimming a hole in the liner to the diameter of the male threads on the bulkhead adaptor included in the overflow kit. The bulkhead can be installed into the liner with the rubber gasket located inside the storage basin and the plastic gasket located on the outside of the storage basin liner. A small bead of silicone can be spread around the rubber gasket where it meets the liner to help ensure a water tight seal. Tighten down the large bulkhead nut being careful to not over-tighten and crack the bulkhead. An adjustable overflow elbow is included with the overflow kit. Add Teflon tape or silicone around the threads of the elbow and install into the bulkhead on the inside of the storage basin. This will allow fine adjustment of the overflow height. Add Teflon tape or silicone around the threads of the PVC male pipe adaptor and install into the bulkhead on the outside of the storage basin. PVC pipe can then be primed and glued into the overflow and run to the overflow location making sure to maintain a decrease in elevation of 1 inch for every 10 feet in run of overflow pipe for proper water flow by gravity.

Managing the overflow will be determined by the conditions on the site. One easy method of managing the overflow is to create an infiltration area using the AquaBlox® Water Matrix® wrapped in geotextile material. The quantity of AquaBlox® required will be based on the site's soil percolation characteristics. See diagrams for example of overflow configuration using AquaBlox® Water Matrix®. There may be other options based on the site characteristics, such as discharging the overflow to a drainage location on the property or directly back into the stormwater drain. Choose the best solution based on the site's characteristics.



Step 11: Backfill Top

The AquaBlox® Water Matrix® tank can be covered with a layer of 1 ½" or larger decorative gravel. Boulders can be placed around the perimeter of the water storage basin to complete the edges of the basin. The liner edges can be trimmed to at least 3" above the maximum water level in the basin and backfilled behind the boulders. The maximum water level is determined by the location of the overflow output. See installation of overflow output for more information.



Permeable paver applications installed on top of the water storage basin require a woven geotextile (Item #30219). The geotextile is laid directly on top of the exposed AquaBlox® Water Matrix® tank. This will provide a base for the paver screening to be spread. See diagram of permeable paver application for more detail.

Note: Do not use the inner and outer non-woven geotextile (underlayment) on top of the AquaBlox® Water Matrix® as it will potentially clog. Follow permeable paver manufacturer's specifications for proper screening and compaction. See diagram section for permeable paver cross section.



Application Diagrams

Pondless® Waterfall application using:

- Large Snorkel™ and ½ Centipede™ Filters
- Large AquaBlox® Water Matrix® (additional AquaBlox® can be used to create larger storage capacity)

Diagram A


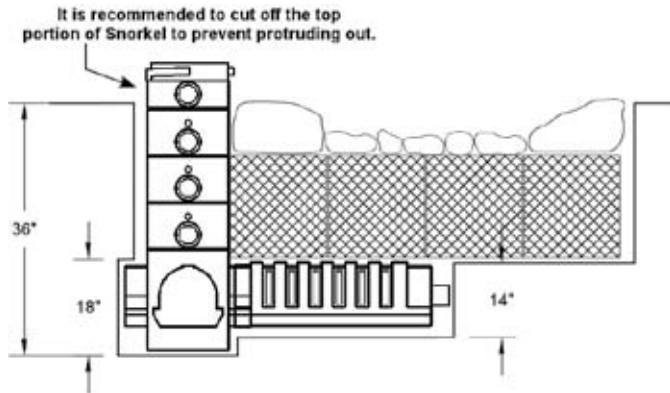


Diagram B

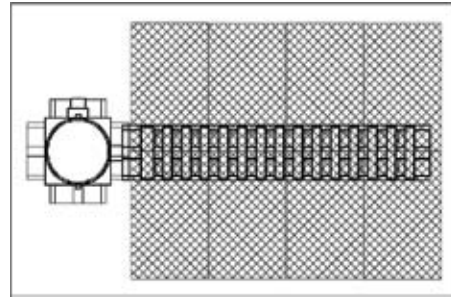

Pondless® Waterfall application using:

- MicroSnorkel™ Vault and MicroCentipede™ Filter
- Small AquaBlox® Water Matrix® (additional AquaBlox® can be used to create larger storage capacity)

Diagram C


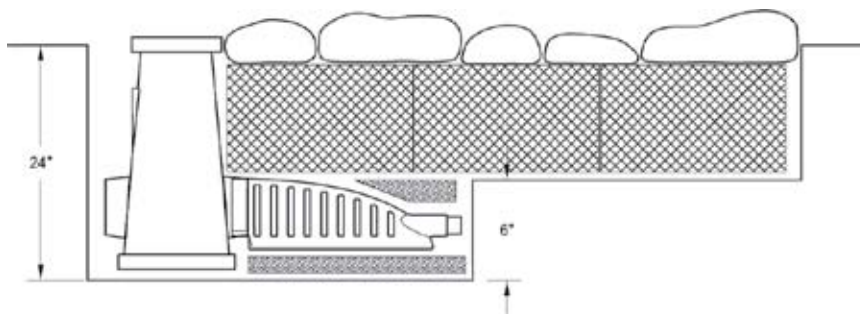



Diagram D

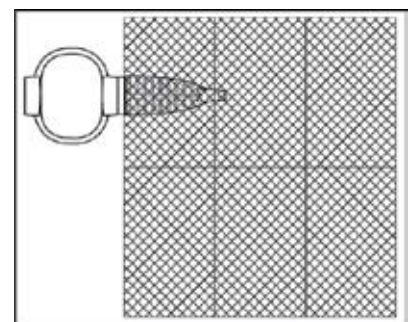


RainXchange™ Applications

The following diagrams include examples of options associated with the RainXchange™ System.

Decorative Fountain

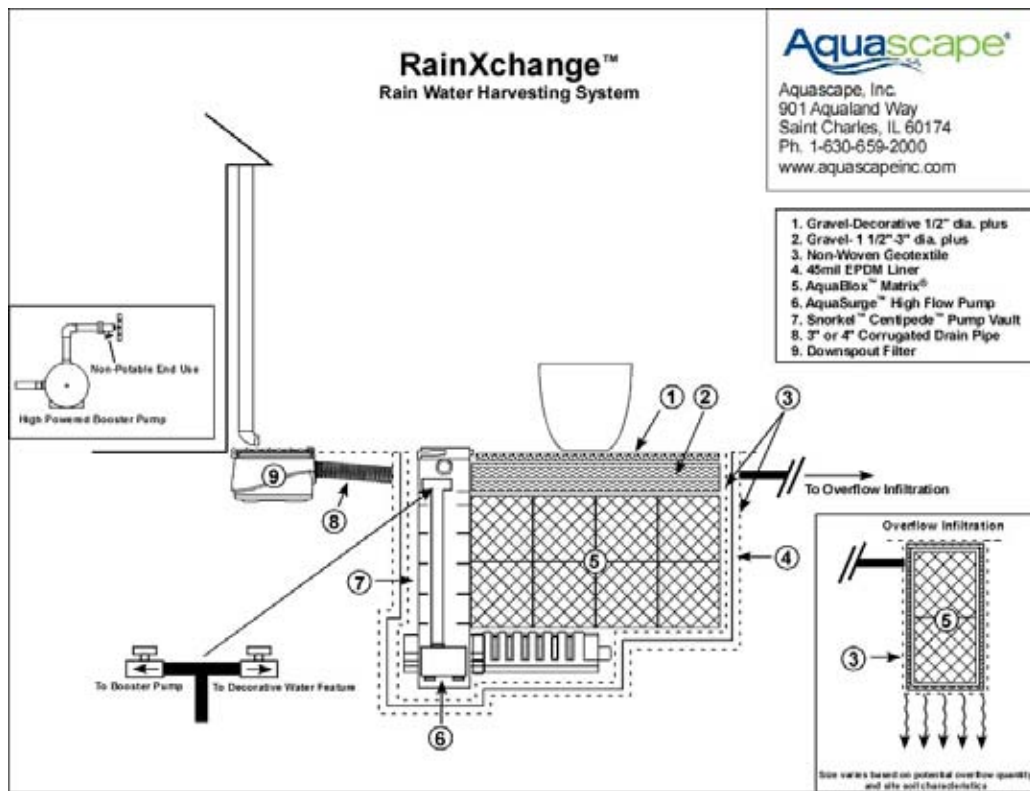


Decorative Fountain with Pervious Paver

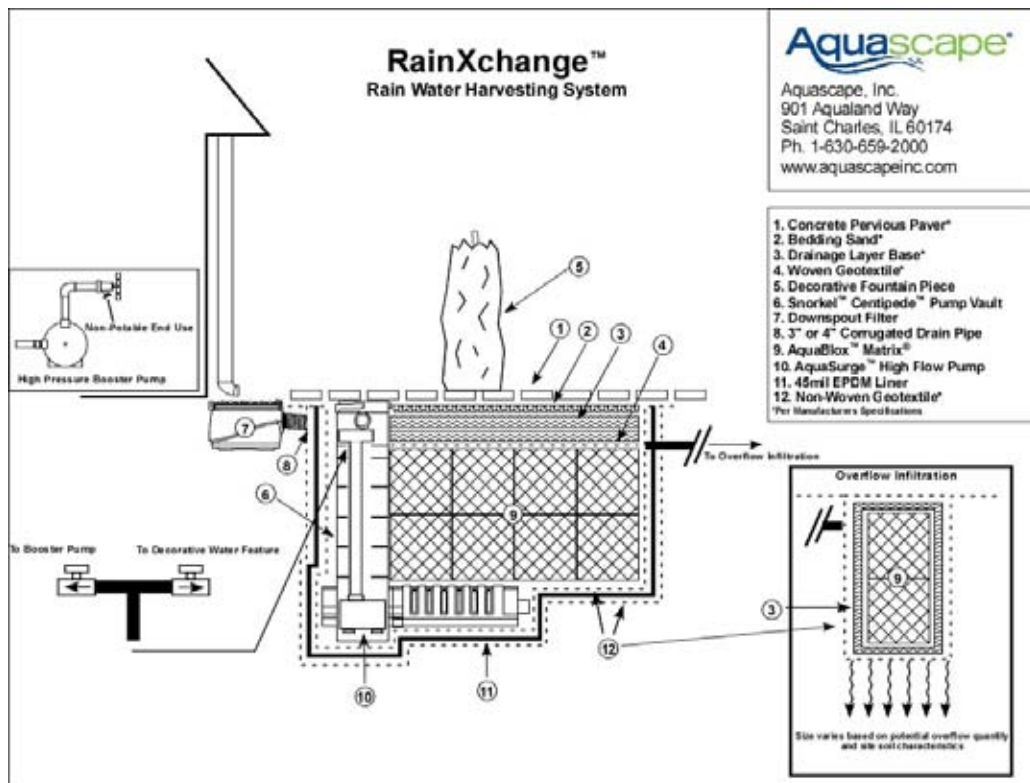

RainXchange™ Applications cont.


Pondless® Waterfall

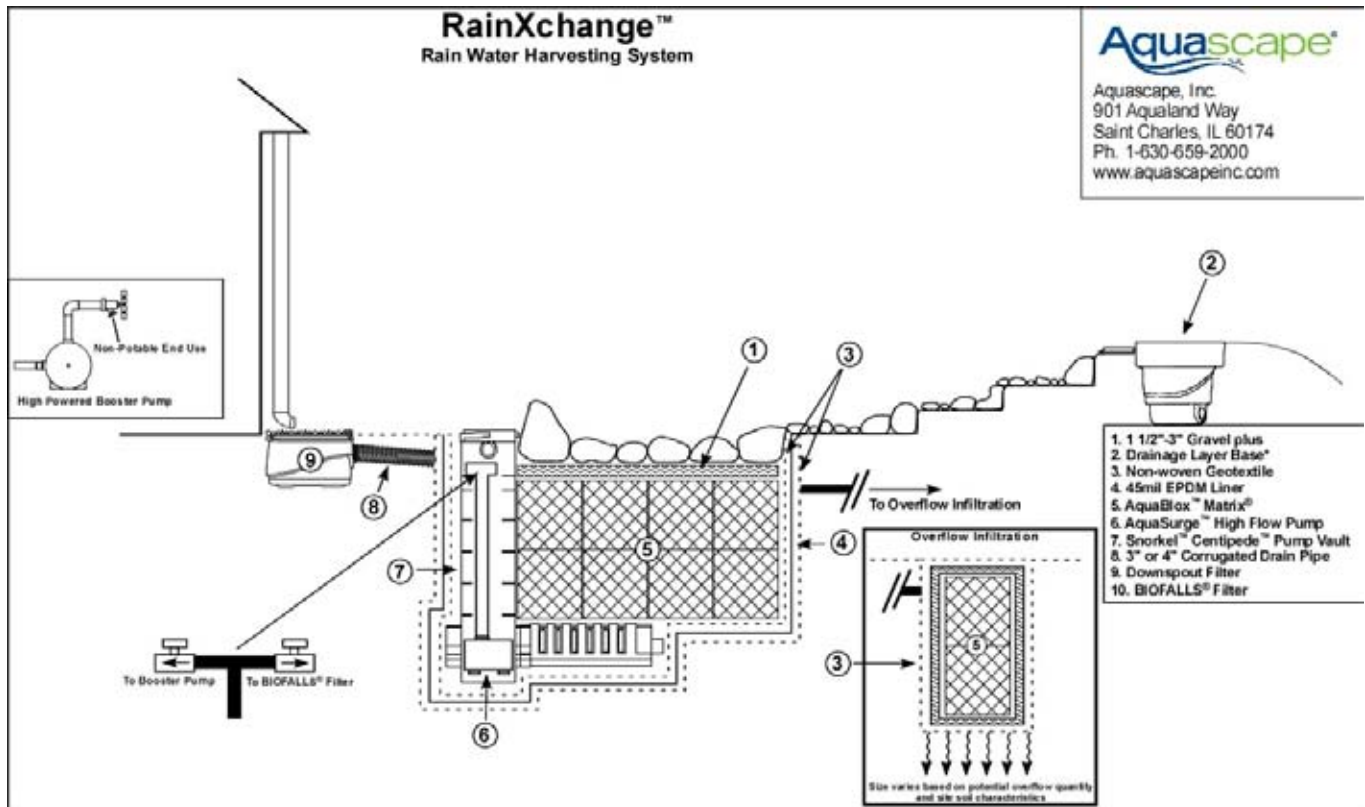


RainXchange™ Water Storage Kits

The following diagrams include the storage basin dimensions, AquaBlox® Water Matrix® configuration and location of the Snorkel™ and Centipede™ Filters. Note: Overflow location and design are dependent on the site characteristics. See install overflow RainXchange™ section of instructions for more information.



500 Gallon System, 6'x9'x4' Basin,
16 AquaBlox, 4x4 configuration

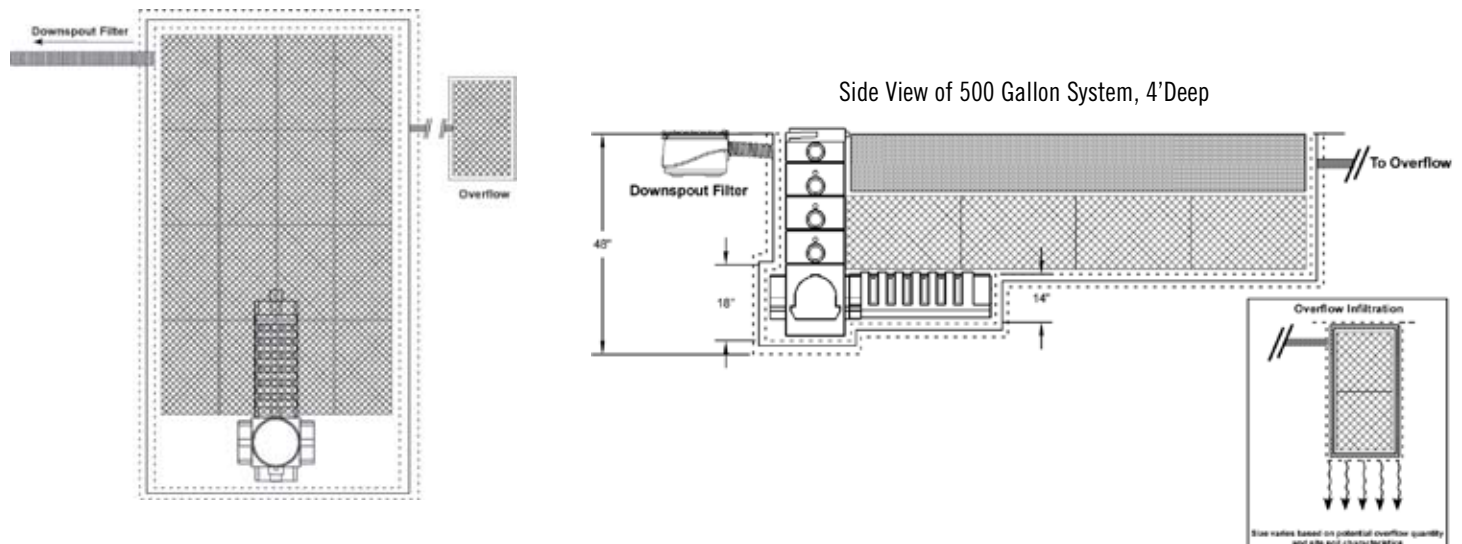


1000 Gallon System, 6'x9'x5' Basin, 32 AquaBlox,
4x4 Configuration, 2 Layers

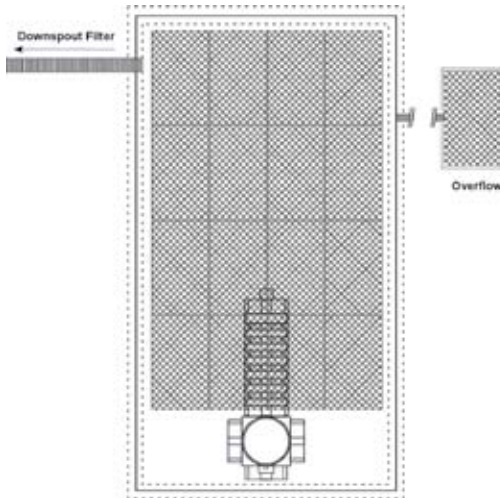



Side View of 1000 Gallon System, 5' Deep

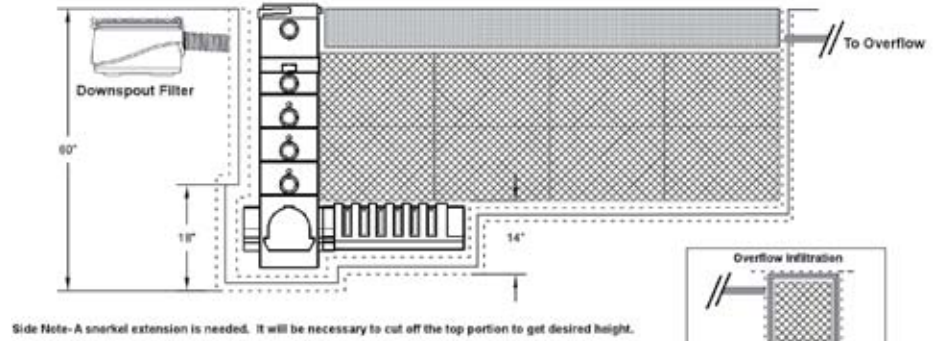

1500 Gallon System, 8'x9'x5' Basin, 48 AquaBlox,
4x6 Configuration, 2 Layers

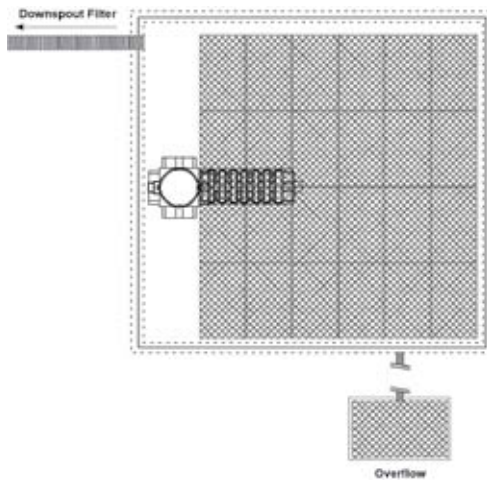


Side View of 1500 Gallon System

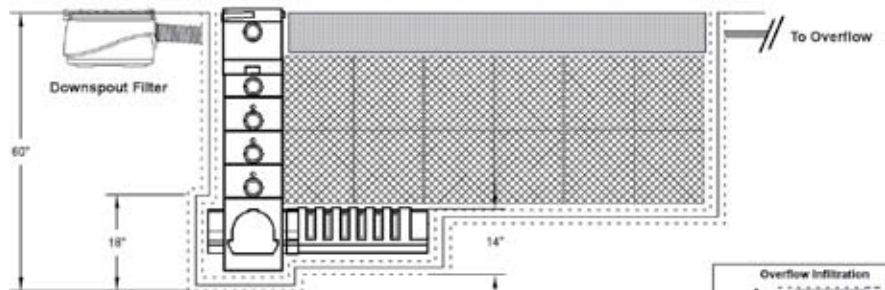


RainXchange™ Water Storage Kits cont.


2000 Gallon System. 11'x9'x5' Basin, 64 AquaBlox,
4x8 Configuration, 2 Layers

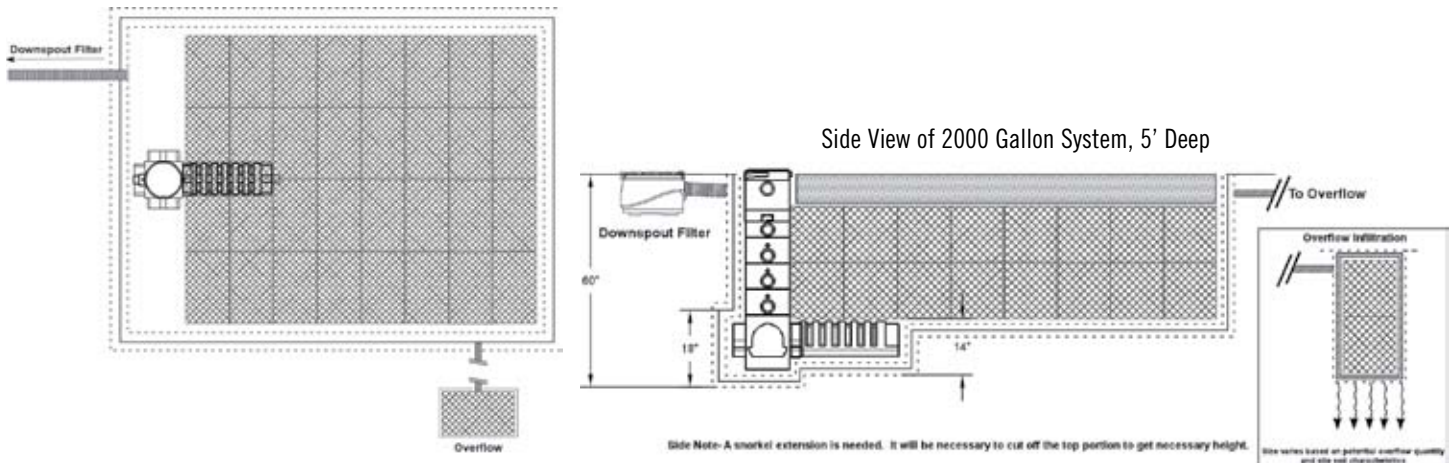

2500 Gallon System. 11'x12'x5' Basin, 80 AquaBlox,
5x8 Configuration, 2 Layers

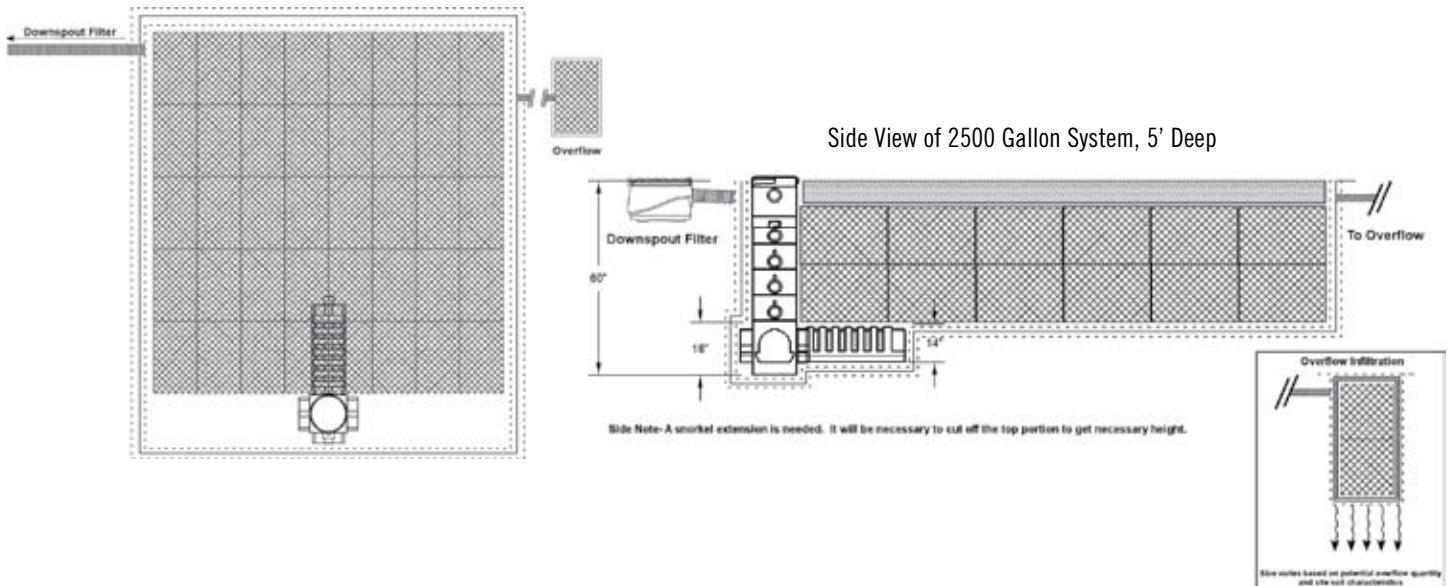


3000 Gallon System. 11'x9'x6' Basin, 96 AquaBlox,
4x8 Configuration, 3 Layers

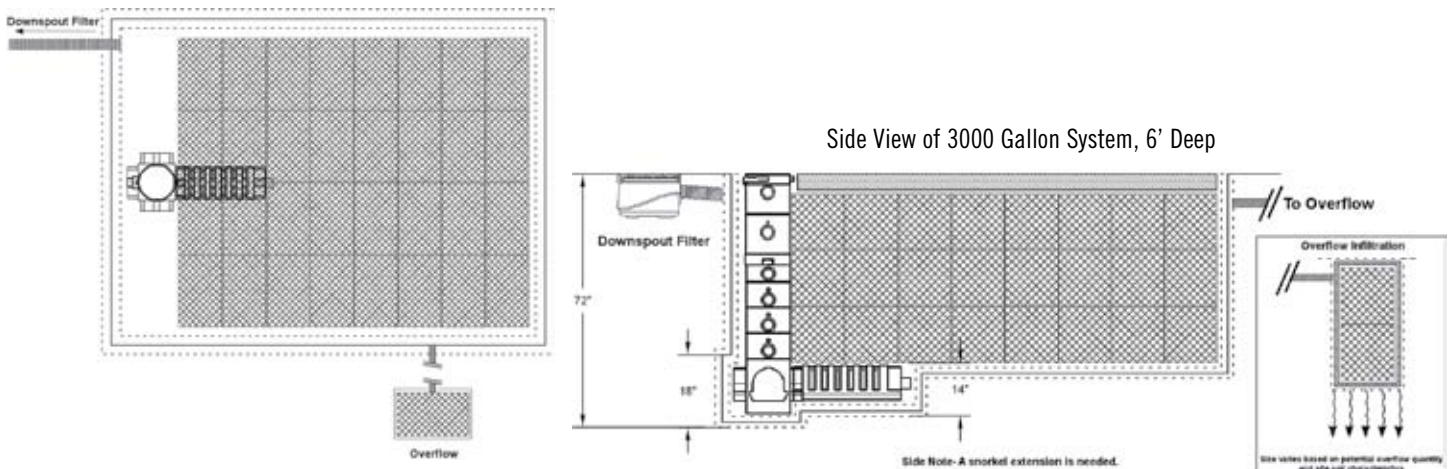

Constructed Wetland application using:

- Large Snorkel™ Vault and Centipede™ Filter
- Small AquaBlox® Water Matrix® - single layer along the bottom of wetland to promote good water circulation throughout the filter and maximize the sediment storage.

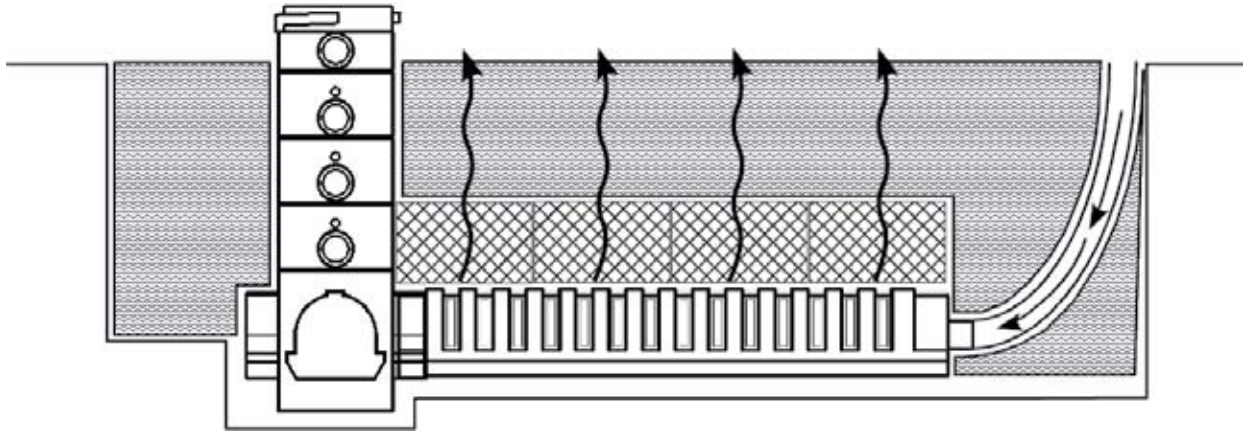

Pump Wet Well application using:

- Large Snorkel™ Vault and Centipede™ Filter
- Small AquaBlox® Water Matrix® - single layer along the top of the centipede to provide good water inflow for the pumps

